


2K PREMIUM THINNER

Material Safety Data Sheet

Coatings used for wood master, especially nitrocellulose based products.

Research and Development Department
Master Paint Industries (Pvt.) Ltd.
Phone : 0 4 2 – 111 – 333 – 465,
E-Mail : info@masterpaints.com

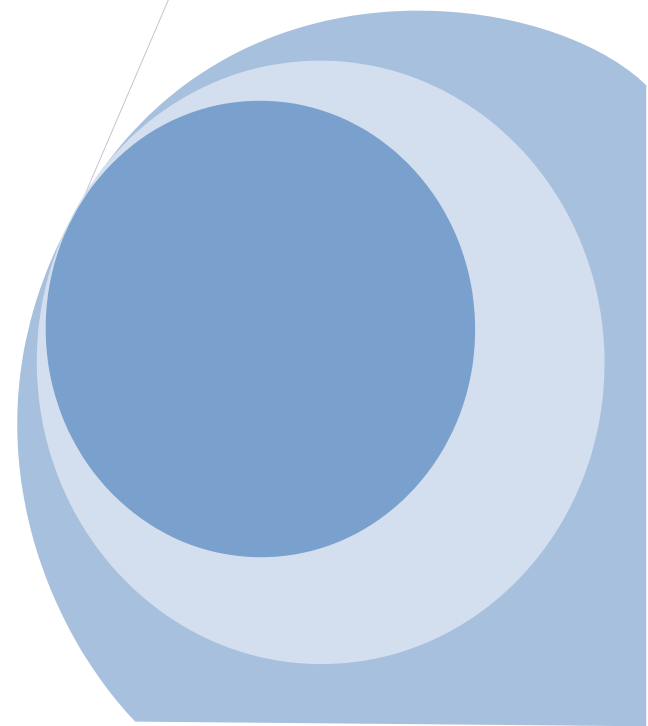

PRODUCT INFORMATION

Description:

Product Description

A Thinner for coatings used for wood master, especially nitrocellulose based products.

Features

- Excellent gloss and color retention on exterior & interior exposures
- Outstanding mar resistance-recommended as scratch resistant finish
- Long term recoat able properties.
- Resistant to large number of chemicals and water.
- Can be applied to a wide range of substrates.

Technical Information

| | |
|----------------|---|
| Coverage | 120-140 sq. ft per Litre |
| Finish | Gloss |
| Application | Use as Thinning Agent |
| Drying Time | 2-3 hours between coats |
| Vol Solid | 45% |
| Mixing Ratio | 3: 1 |
| Spreading Rate | A spreading rate of 10-14 m ² /liter @ (30-40) Microns DFT |
| Recoating Time | 8 – 12 hrs. |
| Pot Life | 1 hrs. |
| No. of coats | 1 |
| Flash Point | 23 oC, 73 oF |

Surface Preparation

Application

Polyurethane Finish is a specialized chemical resistant finish and requires sound preparation and a suitable Priming system to perform to its optimum. It is recommended that potential specifies follow guidelines for preparation from the Data Sheet for the primer system selected.

This is the recommended method of application:

By Brush Roller Or Airless Spray

Stir each component thoroughly before mixing.

Add Comp. B to Comp. A in the ratio supplied and mix until uniform in color and consistency. Allow to absorb for 20 minutes before application.

As this material tends to set up quickly, application should be made with minimum of crossing or lying off.

Thin up to 10-20% per liter with Thinner for PU mixing thoroughly before application.

Health & Safety and Environmental Information:

Keep out of reach of children. Do not swallow. Seek medical advice immediately if swallowed. Ensure good ventilation during application. Avoid contact with skin and eyes and wear safety goggles and mask to avoid breathing vapor and dust. In the event of paint coming into contact with eyes, rinse thoroughly immediately and seek medical advice. Use soap and water to clean any paint on skin. Store the paint in a cool and dry place.

