

## MASTER QUICK DRYING

### Material Safety Data Sheet


Air drying alkyd based paint suitable for refinishing of cars and commercial vehicles. It provides an excellent gloss retention and attractive look.

**Research and Development Department**

**Master Paint Industries (Pvt.) Ltd.**

**Phone : 0 4 2 – 111 – 333 – 465,**

**E-Mail : [info@masterpaints.com](mailto:info@masterpaints.com)**

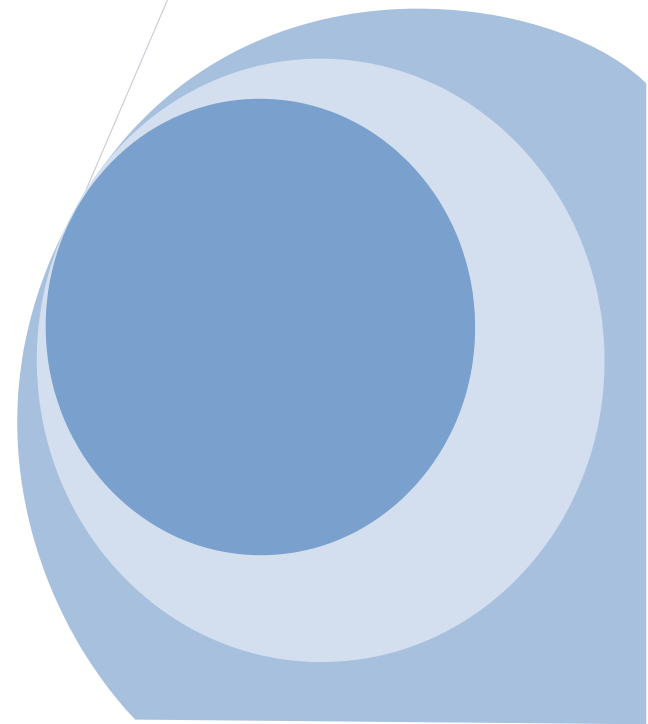

**PRODUCT INFORMATION**

**Description:** Air drying alkyd based paint suitable for refinishing of cars and commercial vehicles. It provides an excellent gloss retention and attractive look. As its surface dries very fast, it resists dirt penetration..

**USES:** For refinishing of cars, commercial vehicles, heavy duty vehicles, appliances and other metal structures.

**TECHNICAL INFORMATION:**

Composition	Mixed oil alkyd resin, pigments and driers.	
Gloss	High	
Flash point	23 - < 30	
Thinner	Quick Drying Thinner	
Dry Film Per Coat	20-25 micron Per Coat	
Number Of Coats	2-3 Coats	
Drying Time	Surface Dry	10-15 minutes
	Hard Dry	24 hours
Application Method	Conventional Spray	

**SURFACE PREPARATION :**

**New Unpainted & Steel Surfaces:**

Remove all dirt and grease etc; by thoroughly wiping with spirit wipe. Prime immediately with Quick Drying primer grey and allow it to dry completely. Wet Scuff with P600-800 paper.

### Previously Painted & Steel:

Thoroughly clean the surface to remove all dirt and grease etc. Remove all loosely adhering or defective paint by scraping back to a firm edge or if necessary completely stripping of the surface. Master Paint Remover can be used for complete, easy and quick removal of previous paint coating. Clean the surface and prime immediately with Quick Drying primer grey and allow it to dry completely. Wet Scuff with P600-800 paper.

### Application:

Apply 2-3 coats of Quick Drying Enamel with 4-5 minutes flash off between coats. Leave the vehicle for adequate period for full curing before use.

### Safety Precautions:

**Storage:** Store in a cool, dry well ventilated place and keep container tightly closed. Keep away from oxidizing agents, strong alkaline and strong acidic materials in order to avoid exothermic reaction. Keep away from sources of ignition - no smoking.

**Handling:** Avoid contact with the skin and eyes. Use suitable eye protection and rubber gloves during application.  
Do not discharge into drains or the environment, dispose to an authorized waste collection point.

### Emergency Treatment:

**EYE:** Irrigate copiously with clean, fresh water for at least 10 minutes, holding eyelids apart. Seek medical advice.

**SKIN:** Remove contaminated clothing, wash skin thoroughly with soap and water, or use a proprietary skin cleanser. Do not use solvents or thinners. Seek medical advice if symptoms persist.

**INHALATION:** Remove to fresh air, keep patient warm and at rest. If breathing is irregular or stopped administer artificial respiration. Give nothing by mouth. If unconscious place in the recovery position. Seek medical advice

**INGESTION:** If accidentally swallowed, DO NOT INDUCE VOMITING. Keep at rest and obtain medical attention.

